




Wireless Paging System User Manual TD162

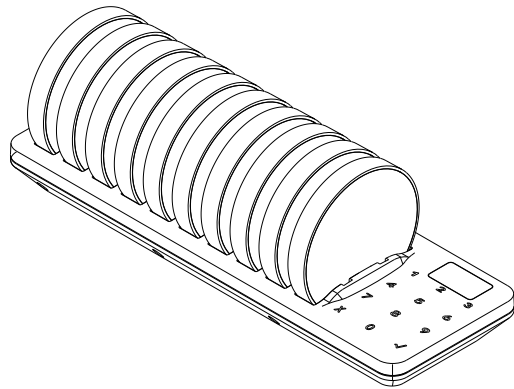

Product Introduction

Thank you for using Reteless TD162 guest paging system, it consists of 1 keyboard transmitter and 10 coaster pagers. Each one keyboard transmitter can expand 998 coaster pagers. It is widely used in fast food restaurants, coffee houses, pizza shops, 4S stores, churches and other places where there are many guests waiting for their services.

The system improves overall efficiency and customer satisfaction, reduces labor costs and enhances image. How to use the coaster paging system?

- 1) Guests come to the restaurant and make an order. The waiter gives each guest a coaster pager; each pager has a specific ID (No.1~998).
- 2) When the order is ready, the waiter at the counter can press the number on the transmitter, the corresponding pager will vibrate, beep or flash to remind customer to pick up the order.


Specifications

Coaster Pager	
Operating Voltage	DC 3.7V (Rechargeable battery)
Working frequency	433MHz
Standby current	≤9mA
Standby time	≈20Hour
Receiving sensitivity	-110dBm
Battery capacity	300mAh
Modulation technology	OOK
Size	Φ80*11.5mm
Keypad Transmitter	
Power input	DC12V/1A
Working Frequency	433MHz
Output power	240mW
Modulation technology	OOK
Size	270*90*29mm

Packing List

Name	Quantity
Keyboard Transmitter	1
Coaster Pager	10
Power Adapter	1
User Manual	1

Product Overview

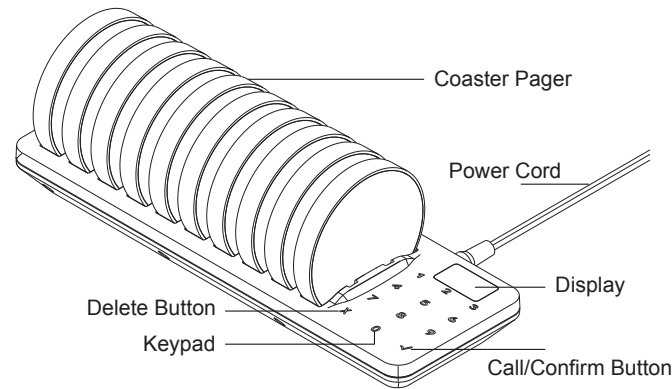

Operating Instructions

Power On

Connect the power supply of the keyboard transmitter, the display will light up. Put the pagers on charging slots and connect the power source. In the charging mode, the indicator light of the pager is always on. The indicator light flashes while in standby mode. "Lo" will be displayed on the digital tube when the pager with a low battery. The pagers could be powered on by putting back them to the charging slot while the keypad transmitter connects the power.

Power Off

Put the pagers on the charging slots, press "999" and then CALL button to turn off all the pagers that in the charging slots. All the pagers in the charging slots will be in the charging mode (there is no number shows on the digital tube). Then disconnect the power source. Don't make the pagers charge or in standby mode for a long time when they are not used. Otherwise it will reduce the battery performance.

Call Pager

Make sure the pager is on standby mode, input the corresponding ID number through the keyboard, then press call button, the pager will beep/vibrate/flash according to the prompt mode. The pager will stop beeping/vibrating/flashing once put it back to the charging slot.

Settings

1. Keypad ID Setting (F1)

Press "Call" and "Delete" buttons at the same time to enter the setting mode, "F1" shows on display. Press "Call" button to enter sub-menu, "0" shows on display. Enter the ID number through Keypad (1-999). Press "Call" button to confirm and it will return back to "F1".

2. Paring Pager ID Setting (F2)

Press "Call" and "Delete" buttons at the same time to enter the setting

mode, "F1" shows on display, enter number "2" through the keypad, "F2" shows on display.

Press "Call" button to enter sub-menu, "0" shows on display.

Enter the ID number through Keypad (1-998).

Remove the pager from charging slot, and press "Call" button within 5s, at the same time, the pager flashes and beeps. It means to be set successfully.

Then it will return back to "F2".

3. Prompt Time Setting (F3)

Press "Call" and "Delete" buttons at the same time to enter the setting mode, "F1" shows on display, enter number "3" through the keypad, "F2" shows on display.

Press "Call" button to enter sub-menu, "0" shows on display.

Enter the desired reminder duration through Keypad (0-250s, if you set 0s, the pager will not stop automatically until you put it back to the charging slot)

Remove the pagers from charging slots, and press "Call" button within 5s, at the same time, the pagers flash and beep. It means to be set successfully. Then it will return back to "F3" automatically.

4. Beep Prompt Speed Setting (F4)

Press "Call" and "Delete" buttons at the same time to enter the setting mode, "F1" shows on display, enter number "4" through the keypad, "F4" shows on display.

Press "Call" button to enter sub-menu, "0" shows on display.

Enter the desired value (0 for turn off beep, 1 for slow mode, 2 for medium speed, 3 for fast mode).

Remove the pagers from charging slots, and press "Call" button within 5s, at the same time, the pagers flash and beep. It means to be set successfully. Then it will return back to "F4" automatically.

5. Vibration Prompt Setting (F5)

Press "Call" and "Delete" buttons at the same time to enter the setting mode, "F1" shows on display, enter number "5" through the keypad, "F5" shows on display.

Press "Call" button to enter sub-menu, "0" shows on display.

Enter the desired value (0 for turn off vibration, other values for turn on vibration mode).

Remove the pagers from charging slots, and press "Call" button within 5s, at the same time, the pagers flash and beep. It means to be set successfully. Then it will return back to "F5" automatically.

6. Flash Prompt Speed Setting (F6)

Press "Call" and "Delete" buttons at the same time to enter the setting mode, "F1" shows on display, enter number "6" through the keypad, "F6" shows on display.

Press "Call" button to enter sub-menu, "0" shows on display.

Enter the desired value (0 for turn off flash, 1 for slow mode, 2 for fast mode, 3 for breathing light mode).

Remove the pagers from charging slots, and press "Call" button within 5s, at the same time, the pagers flash and beep. It means to be set successfully. Then it will return back to "F6" automatically.

After all the settings completed, press the "Delete" button to return to Call state.

Precautions

RF ENERGY EXPOSURE AND PRODUCT SAFETY GUIDE



Before using this radio, read this guide which contains important operating instructions for safe usage and RF energy awareness and control for compliance with applicable standards and regulations.

This radio uses electromagnetic energy in the radio frequency (RF) spectrum to provide communications between two or more users over a distance. RF energy, which when used improperly, can cause biological damage. All Reteless radios are designed, manufactured, and tested to ensure they meet government-established RF exposure levels. In addition, manufacturers also recommend specific operating instructions to users of the radios. These instructions are important because they inform users about RF energy exposure and provide simple procedures on how to control it. Please refer to the following websites for more information on what RF energy exposure is and how to control your exposure to assure compliance with established RF exposure limits: <http://www.who.int/en/>

Local Government Regulations

When radios are used as a consequence of employment, the Local Government Regulations requires users to be fully aware of and able to control their exposure to meet occupational requirements. Exposure awareness can be facilitated by the use of a product label directing users to specific user awareness information. Your Reteless radio has a RF Exposure Product Label. Also, your Reteless user manual, or separate safety booklet includes information and operating instructions required to control your RF exposure and to satisfy compliance requirements.

Radio License (if appropriate)

Governments keep the radios in classification, business radios operate on radio frequencies that are regulated by the local radio management departments (FCC, ISED, OFCOM, ANFR, BFTK, Bundesnetzagentur...). To transmit on these frequencies, you are required to have a license issued by them. The detailed classification and the use of your radios, please contact the local government radio management departments. Use of this radio outside the country where it was intended to be distributed is subject to government regulations and may be prohibited.

Unauthorized modification and adjustment

Changes or modifications not expressly approved by the party responsible for compliance may void the user's authority granted by the local government radio management departments to operate this radio and should not be made. To comply with the corresponding requirements, transmitter adjustments should be made only by or under the supervision of a person certified as technically qualified to perform transmitter maintenance and repairs in the private land mobile and fixed services as certified by an organization representative of the user of those services. Replacement of any transmitter component (crystal, semiconductor, etc.) not authorized by the local government radio management departments equipment authorization for this radio could violate the rules.

FCC Requirements:

•This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation.
 •(If applicable) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 -- Reorient or relocate the receiving antenna.
 -- Increase the separation between the equipment and receiver.
 -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 -- Consult the dealer or an experienced radio/TV technician for help.

CE Requirements:
 •(Simple EU declaration of conformity) Henan Eshow Electronic Commerce Co.,Ltd declares that the radio equipment type is in compliance with the essential requirements and other relevant provisions of RED Directive 2014/53/EU and the ROHS Directive 2011/65/EU and the WEEE Directive 2012/19/EU; the full text of the EU declaration of conformity is available at the following internet address: www.retekess.com.

•Disposal
 The crossed-out wheeled-bin symbol on your product, literature, or packaging reminds you that in the European Union, all electrical and electronic products, batteries, and accumulators (rechargeable batteries) must be taken to designated collection locations at the end of their working life. Do not dispose of these products as unsorted municipal waste. Dispose of them according to the laws in your area.


IC Requirements:
 Licence-exempt radio apparatus
 This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.
 (2) This device must accept any interference, including interference that may cause undesired operation of the device.
 Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
 (1) l'appareil ne doit pas produire de brouillage;
 (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF Exposure Information (if appropriate)
 •DO NOT operate the radio without a proper antenna attached, as this may damage the radio and may also cause you to exceed RF exposure limits. A proper antenna is the antenna supplied with this radio by the manufacturer


or an antenna specifically authorized by the manufacturer for use with this radio, and the antenna gain shall not exceed the specified gain by the manufacturer declared.
 •DO NOT transmit for more than 50% of total radio use time, more than 50% of the time can cause RF exposure compliance requirements to be exceeded.
 •During transmissions, your radio generates RF energy that can possibly cause interference with other devices or systems. To avoid such interference, turn off the radio in areas where signs are posted to do so.
 •The device complies with RF specifications when the device used at 5mm from your body. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided.
 •DO NOT operate the transmitter in areas that are sensitive to electromagnetic radiation such as hospitals, aircraft, and blasting sites.

Avoid Choking Hazard

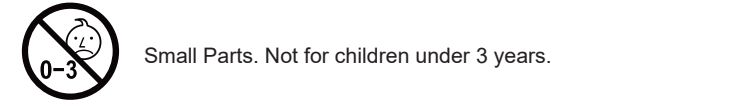

Small Parts. Not for children under 3 years.

Protect your hearing:

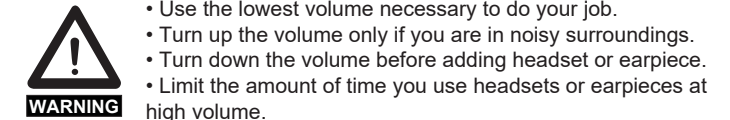


- Use the lowest volume necessary to do your job.
- Turn up the volume only if you are in noisy surroundings.
- Turn down the volume before adding headset or earpiece.
- Limit the amount of time you use headsets or earpieces at high volume.
- When using the radio without a headset or earpiece, do not place the radio's speaker directly against your ear
- Use careful with the earphone maybe possible excessive sound pressure from earphones and headphones can cause hearing loss



Note: Exposure to loud noises from any source for extended periods of time may temporarily or permanently affect your hearing. The louder the radio's volume, the less time is required before your hearing could be affected. Hearing damage from loud noise is sometimes undetectable at first and can have a cumulative effect.

Avoid Burns

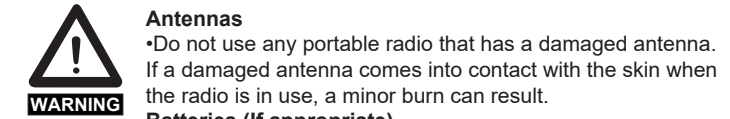


Antennas
 •Do not use any portable radio that has a damaged antenna. If a damaged antenna comes into contact with the skin when the radio is in use, a minor burn can result.

Batteries (if appropriate)
 •When the conductive material such as jewelry, keys or chains touch exposed terminals of the batteries, may complete an electrical circuit (short circuit the battery) and become hot to cause bodily injury such as burns. Exercise care in handling any battery, particularly when placing it inside a pocket, purse or other container with metal objects

Long transmission
 •When the transceiver is used for long transmissions, the radiator and chassis will become hot.


Safety Operation



Forbid
 •Do not use charger outdoors or in moist environments, use only in dry locations/conditions.
 •Do not disassemble the charger, that may result in risk of electrical shock or fire.
 •Do not operate the charger if it has been broken or damaged in any way.
 •Do not place a portable radio in the area over an air bag or in the air bag deployment area. The radio may be propelled with great force and cause serious injury to occupants of the vehicle when the air bag inflates.

To reduce risk
 •Pull by the plug rather than the cord when disconnecting the charger.
 •Unplug the charger from the AC outlet before attempting any maintenance or cleaning.
 •Contact Retekeess for assistance regarding repairs and service.
 •The adapter shall be installed near the equipment and shall be easily accessible
 •Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.
 •Adapter shall be installed near the equipment and shall be easily accessible.
 •The plug considered as disconnect device of adapter.
 •The operating temperature of the EUT can't exceed the specified range.

Approved Accessories

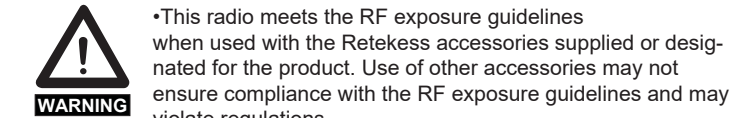

•This radio meets the RF exposure guidelines when used with the Retekeess accessories supplied or designated for the product. Use of other accessories may not ensure compliance with the RF exposure guidelines and may violate regulations.
 •For a list of Retekeess-approved accessories for your radio model, visit the following website: <http://www.Retekeess.com>

Guarantee

Model Number: _____
 Serial Number: _____
 Purchasing Date: _____
 Dealer: _____ Telephone: _____
 User's Name: _____ Telephone: _____
 Country: _____ Address: _____
 Post Code: _____ Email: _____

Remarks:
 1.This guarantee card should be kept by the user, no replament if lost.
 2.Most new products carry a two-year manufacturer's warranty from the date of purchase.
 3.The user can get warranty and after-sales service as below:
 • Contact the seller where you buy.
 • Products Repaired by Our Local Repair Center
 4.For warranty service, you will need to provide a receipt proof of purchase from the actual seller for verification.

Exclusions from Warranty Coverage:
 1.To any product damaged by accident.
 2.In the event of misuse or abuse of the product or as a result of unauthorized alterations or repairs.
 3.If the serial number has been altered, defaced, or removed.

EU Importer:
 Name: Germany Retevis Technology GmbH
 Address: Uetzenacker 29,38176 wendeburg



说明书要求

尺寸：100*205mm

印刷：
黑白印刷

装订：
折页

纸张材质：
铜版纸

本页无需印刷