


Retekess

USER MANUAL FOR TR601

Product control diagram

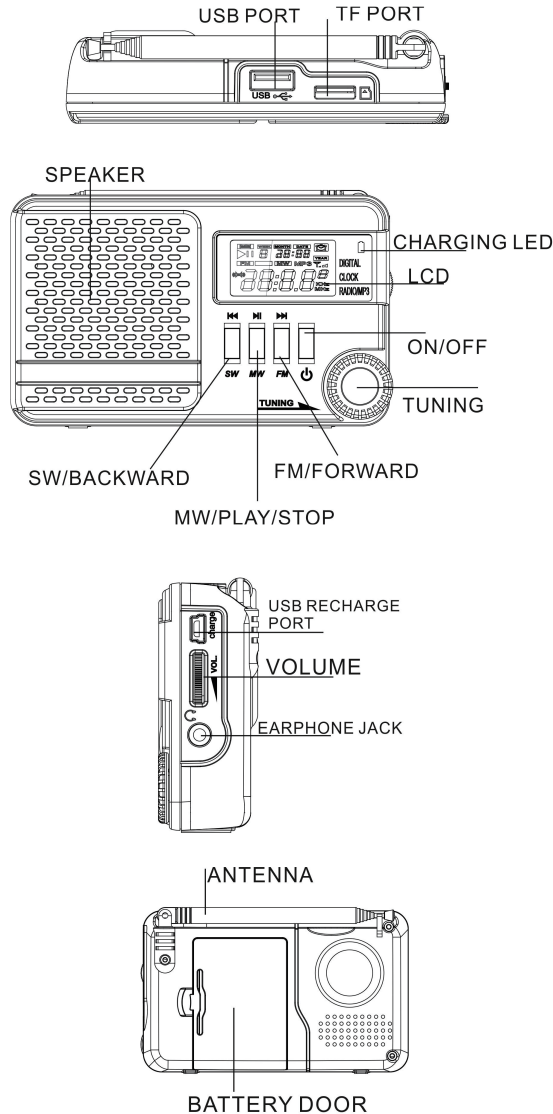

Main Function

1. Radio with FM1, FM2, MW, SW1-8
2. Alarm with radio (wake up radio)
3. Sleep Function (10-90 minutes)
4. time day, month, year display
5. Use coder tuning
6. MP3 player support TF card & USB port
7. Use Li-ion Battery

Insert Batteries

- a. Takeoff the batteries compartment cover
- b. Insert the LI-ION battery and make sure the polarity is correct
- c. Replace the cover
- d. The LCD will display the time:12:00

Setting the Time

- a. Press FM/FORWARD key, the hour 12 will flash, use the TUNING knob to adjust the time
- b. Press FM/FORWARD key to finish the hour setting, at the same time, the minutes 00 will flash; also use the TUNING knob to make adjustment. And FM/FORWARD key to finish setting
- c. and then same way for Year, Month, Day

Setting Alarm

- a. Press MW/PLAY/STOP key, the ALARM icon will display on LCD, the LCD also display 6:00 (if you have set the alarm time, then before , then here display the time you set before)
- b. Press FM/FORWARD key, the hour: 6 flash, use Tuning Knob to adjust the Hour. Press FM/FORWARD key, the minutes 00 will flash, use TUNING knob to adjust the minutes.
- c. Press FM/FORWARD key to finish the setting
- d. Then when the alarm time coming, the Radio(FM) will be on.
- e. Turn on/off the alarm function, under the time display, Press MW/PLAY/STOP key, the alarm icon will be disappear, it means the alarm is off, press MV/PLAY/STOP key again, the alarm icon appear on LCD, it means the Alarm function is on.

Sleep Function

- a. Under the condition of radio off, keep pressing ON/OFF key for 3 second,
- b. the LCD will display 90 (it mean that after 90 minutes, the radio will be off automatically.)
- c. Use ON/OFF key to adjust time; it is from90-10 minutes you can choice
- d. after you setting, the radio will be on, and a Sleep icon are display on the LCD
- e. when the time coming, the radio will be off

Using the Radio

- a. Press ON/OFF Key to turn on the radio
- b. Turn the volume control knob to control the volume
- c. Press FM key to get the FM station, and press FM once more to get FM1 station (make sure the soft antenna have been inserted on the unit)
- d. Press MW key to get the MW station
- e. Press SW key to get the SW station, press SW key again and again, the SW will change from SW1 to SW8
- f. Rotate the Tuning knob to the frequency of your programmer, frequency display on LCD
- g. Turn off radio by pressing the Power Key
- h. Hold down the MW key and rotate the selector knob at the same time. The screen shows the number 9 and 10 switching. This value represents the step-by-step value of the selector in different regions. Please select 10 for use in the Americas and 9 for other regions.

Using the MP3 to Play TF Card

- a. Insert the TF card into the TF port; or insert the USB memory bar into the USB port. Press the ON/OFF key to turn on the radio, and keep press MW/PLAY/STOP key for 3 second, the unit will play MP3 song
- b. Use the BACKWARD, PLAY/STOP FORWARD key to control the MP3 playing

How to recharge the battery

- a. Insert the rechargeable cable, one side insert into the computer or adaptor USB port, one side into the unit USB rechargeable port
- b. When charging, the charging LED will be on

Specification

Frequency Range	FM1	64-87MHz	SW4	11.65-13.595MHz
	FM	87-108MHz	SW5	13.6-15.095MHz
	MW	522-1710MHz	SW6	15.1-17.495MHz
	SW1	5.95-7.095MHz	SW7	17.5-21.445MHz
	SW2	7.1-9.495MHz	SW8	21.45-21.85MHz
	SW3	9.5-11.645MHz		
Power	3.7V Li-ion rechargeable battery			
Speaker	0.5W, 8Ω			
Backlight	Blue color, 10 seconds maintain			

Guarantee

Remarks:

1. This guarantee card should be kept by the user, no replacement if lost.
2. Most new products carry a two-year manufacturer's warranty from the date of purchase. Further details, pls read <http://www.retevis.com/after-sale/>
3. The user can get warranty and after-sales service as below:
 - Contact the seller where you buy.
 - Products Repaired by Our Local Repair Center.
4. For warranty service, you will need to provide a receipt proof of purchase from the actual seller for verification.

Exclusions from Warranty Coverage:

1. To any product damaged by accident.
2. In the event of misuse or abuse of the product or as a result of unauthorized alterations or repairs.
3. If the serial number has been altered, defaced, or removed.

Guarantee	
Model Number:	
Serial Number:	
Purchasing Date:	
Dealer:	
Telephone:	
User's Name:	
Telephone:	
Country:	
Address:	
Post Code:	
Email:	

Warnings



Before using this radio, read this guide which contains important operating instructions for safe usage and RF energy awareness and control for compliance with applicable standards and regulations.

Local Government Regulations

When the radios are used as a consequence of employment, the Local Government Regulations requires users to be fully aware of and able to control their exposure to meet occupational requirements. Exposure awareness can be facilitated by the use of a product label directing users to specific user awareness information. Your Reteless radio has a RF Exposure Product Label. Also, your user manual, or separate safety booklet includes information and operating instructions required to control your RF exposure and to satisfy compliance requirements.

Compliance with RF Exposure Standards (If appropriate, Reference to the actual product's Safety Marking)

Your Reteless radio is designed and tested to comply with a number of national and International standards and guidelines (listed below) for human exposure to radio frequency electro-magnetic energy.

FCC ID

The FCC ID means: This radio complies with the IEEE (FCC) and ICNIRP exposure limits for occupational/controlled RF exposure environments at operating duty factors of up to 50% talk-50% listen and is approved for occupational use only.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



The CE marking means: Hereby, Henan Eshow Electronic Commerce Co.,Ltd. declares that the radio equipment type is in compliance with the RED Directive 2014/53/EU and the ROHS Directive 2011/65/EU and the WEEE Directive 2012/19/EU. The full text of the EU declaration of conformity is available at the following internet address: www.tivdio.com

IC ID

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

In terms of measuring RF energy for compliance with these exposure guidelines, your radio generates measurable RF energy only while it is transmitting (during talking), not when it is receiving (listening) or in standby mode.

Avoid Choking Hazard



Small Parts. Not for children under 3 years.

Protect your hearing



- Use the lowest volume necessary to do your job.
- Turn up the volume only if you are in noisy surroundings.
- Turn down the volume before adding headset or earpiece.

Turn off your radio power in the following conditions:



- Turn off your radio before removing (installing) a battery or accessory or when charging battery.
- Turn off your radio when you are in a potentially hazardous environments: Near electrical blasting caps, in a blasting area, in explosive atmospheres (flammable gas, dust particles, metallic powders, grain powders, etc.).
- Turn off your radio while taking on fuel or while parked at gasoline service stations.

To avoid electromagnetic interference and/or compatibility conflicts

- Turn off your radio in any facility where posted notices instruct you to do so, hospitals or health care facilities (Pacemakers, Hearing Aids and Other Medical Devices) may be using that is sensitive to external RF energy.
- Turn off your radio when on board an aircraft. Any use of a radio must be in accordance with applicable regulations per airline crew instructions.

Avoid Burns



Antennas

- Do not use any portable radio that has a damaged antenna. If a damaged antenna comes into contact with the skin when the radio is in use, a minor burn can result.

Batteries (If appropriate)

- When the conductive material such as jewelry, keys or chains touch exposed terminals of the batteries, may complete an electrical circuit (short circuit the battery) and become hot to cause bodily injury such as burns. Exercise care in handling any battery, particularly when placing it inside a pocket, purse or other container with metal objects.

Long transmission (If appropriate)

- When the transceiver is used for long transmissions, the radiator and chassis will become hot.

Safety Operation



Forbid

- Do not use charger outdoors or in moist environments, use only in dry locations/conditions.
- Do not disassemble the charger, that may result in risk of electrical shock or fire.
- Do not operate the charger if it has been broken or damaged in any way.
- Do not place a portable radio in the area over an air bag or in the air bag deployment area. The radio may be propelled with great force and cause serious injury to occupants of the vehicle when the air bag inflates.

To reduce risk

- Pull by the plug rather than the cord when disconnecting the charger.
- Unplug the charger from the AC outlet before attempting any maintenance or cleaning.
- Contact Reteless for assistance regarding repairs and service.

EU Importer:
Name: Germany Retevis Technology GmbH
Address: Uetzenacker 29,38176 wendeburg